


...the choice matters

www.matsdirect.co.uk

General purpose SBR synthetic/natural Rubber matting. Rope pattern low relief design surface offers anti-slip characteristics from any direction of approach and relatively easy cleaning. Aesthetically pleasing, hard wearing Rubber flooring ideal for many applications in a wide variety of environments.

Sure tred rope Rubber matting can be stuck directly over existing hard flooring in most cases and also ideally suited for loose lay applications for walkways, treadmats, runners and general purpose industrial and commercial areas.

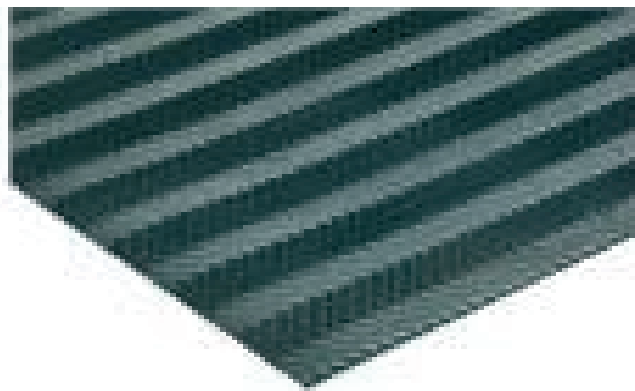

Colours:	Black	Thickness:(mm)	3
Hardness:	65 shore A	Roll size (10m x 1.2m):	EX STOCK
Tensile:	3.0 Mp	Weight/ M2 (kgs- appx):	3.5 @ 3mm
Elongation	150%		
Temperature Range:	-20/+70 Deg C		
Abrasion Resistance:	325 mm3		

MD598 Rope Matting Performance.

- Outstanding soil retention and moisture dispersion properties
- Extremely hard working Rubber mats
- Positive safe grip from multidirectional pattern

Colour Fastness

To sunlight, general cleaning and remedial treatment

Cleaning and Maintenance Daily:

Vacuum clean. An upright unit with a powered cylindrical brush is ideal.

MatsDirect UK Ltd
Unit 2 Bolholt Industrial Park
Bury
Lancashire
BL8 1PL UK

For all enquires:

Tel: 0044 (0)161 797 6785
Fax: 0044 (0)161 797 6349
E-mail: sales@matsdirect.co.uk