



Electrosafe MD574
Earthing Floor matting


...the choice matters

www.matsdirect.co.uk

Tested & Stamped to European IEC 61111 Class 4 specification

An extremely ultra high specification quality natural Rubber compound safety matting product able to withstand the following:

Dielectric test	50,000v
Surface proof test	40,000v
Working voltage	36,000v

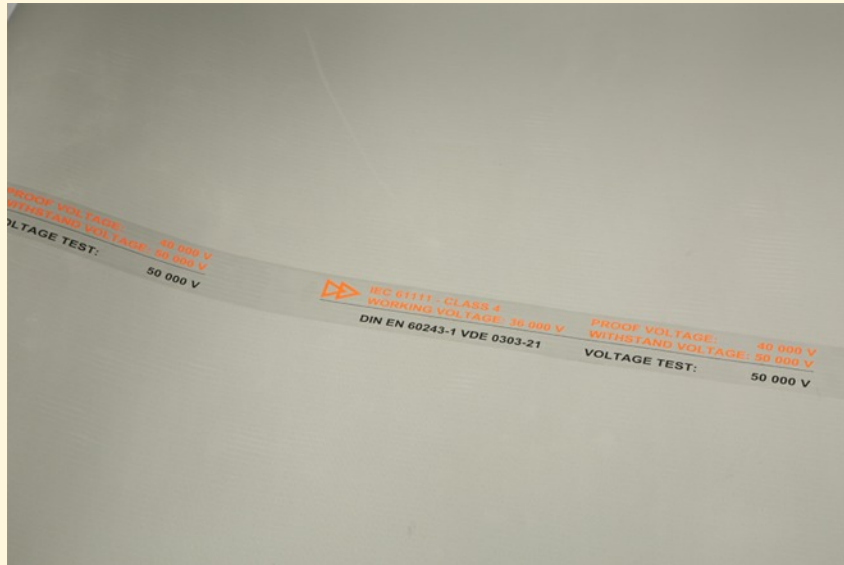

Colour:	Grey
Hardness:	65 shore A
Tensile:	6.0 Mp
Temperature Range:	-20/+70DegC

Thickness:mm	4.5
Weight/M2 (Kg- Approx):	6.1
Roll size (10m x 1.0m):	Ex Stock
Roll size (10m x 1.2m):	Ex Stock

MD574 Electrosafe Matting Performance.

- Fully branded on reverse
- Extremely safe from electrical shock and hard wearing
- Positive safe grip from the flutes

Cleaning and Maintenance:

Matting may be washed with soap or a mild non-bleaching detergent. After washing, the matting should be rinsed thoroughly with water. Matting should be air dried, but not such that the matting temperature exceeds 65°C.

MatsDirect UK Ltd
Unit 2 Bolholt Industrial Park
Walshaw Road
Bury, Lancashire
BL8 1PL UK

For all enquiries:

Tel: 0044 (0)161-797-6785
Fax: 0044 (0)161-797-6349
E-mail: sales@matsdirect.co.uk