


## VDEO 303 Certification

An extremely ultra high specification quality natural Rubber compound safety matting product able to withstand the following:

Dielectric test: 50,000v

Working voltage: 1,000v

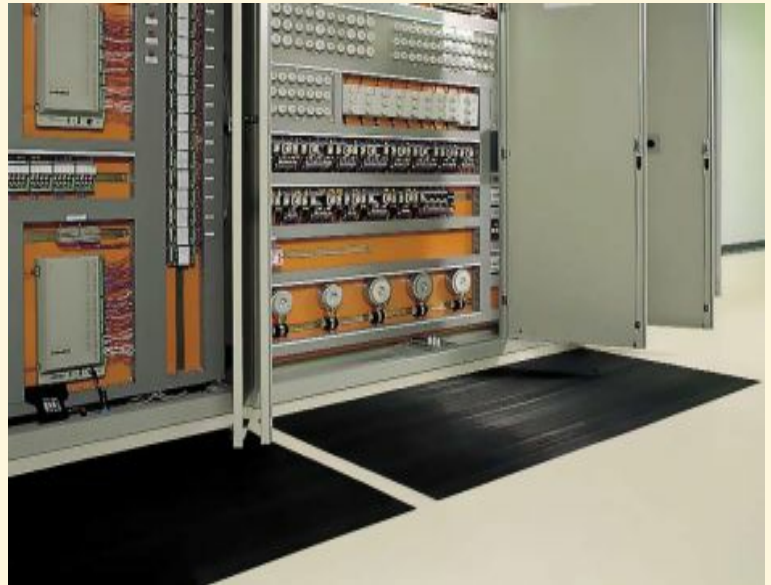

<b>Colour:</b>	Grey
<b>Hardness:</b>	65 shore A
<b>Tensile:</b>	5.0 Mp
<b>Elongation</b>	250%
<b>Temperature Range:</b>	-20/+70 DegC
<b>Abrasion Resistance:</b>	180 mm3

<b>Thickness:</b>	4.0mm
<b>Weight/M2 (Kg- Approx):</b>	4.2 Kg
<b>Roll size (10m x 1m):</b>	EX STOCK
<b>Roll size (10m x 1.2m):</b>	EX STOCK

## MD580 Electrosafe Matting Performance.

Fully branded on reverse

Extremely safe from electrical shock and hard wearing

Positive safe grip from the flutes

### Cleaning and Maintenance Daily:

Matting may be washed with soap or a mild non-bleaching detergent.

After washing, the matting should be rinsed thoroughly with water.

Matting should be air dried, but not such that the matting temperature exceeds 65°C.

### MatsDirect UK Ltd

Unit 2 Bolholt Industrial Park  
Walshaw Road  
Bury, Lancashire  
BL8 1PL UK

### For all enquiries:

**Tel:** 0044 (0)161-797-6785

**Fax:** 0044 (0)161-797-6349

**E-mail:** [sales@matsdirect.co.uk](mailto:sales@matsdirect.co.uk)