






Cero Plus rolls are manufactured on a PVC backing with borders on the long sides. Colour available: dark grey.

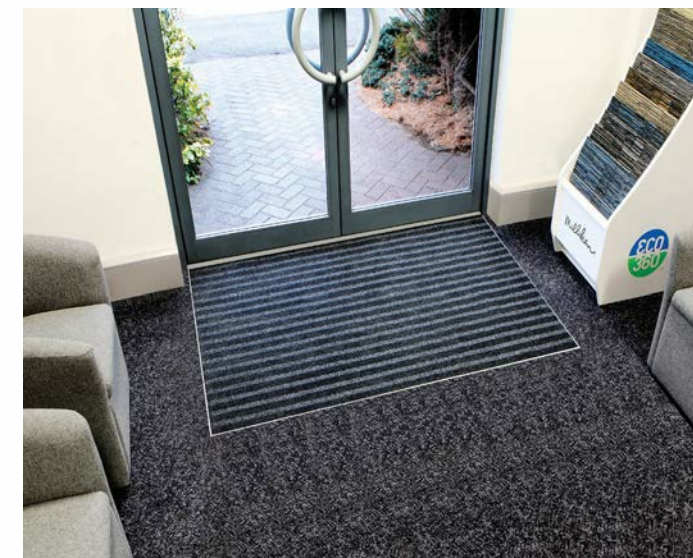

Rolls can be cut to the desired length to produce a tailor made mat or runner. This can be loose laid on the floor, or bonded to the subfloor using an acrylic tackifier adhesive.

Cero Plus in a recessed mat well

Eco-flex® underlay can be used to compensate mat well depth when fitting Cero Plus in a mat well. Cero Plus can be cut to fit mat well size.



Technical Specifications: MD7100 Cero Plus Rolls

Product Construction	Solution dyed high-twist and heat-set multi-filament nylon tufted in alternate rows with mono-filament nylon - 100% PVC backing
Size in cm (ca.)	200x2500
Fabric weight (ca.)	860 gms/m ²
Total weight	3360 gms/m ²
Pile height	9.5 mm
Electrical behaviour	EN ISO 14041 test - Antistatic
UV resistance	ISO 105-B02 test, rated 8 (max.mark)
Fire resistance classification	EN ISO 13501 test - C _{fl} - s1

All specifications are according to ISO 9001 Quality certification and ISO 14001 Environmental certification, and are subject to change to meet the ongoing improvements and innovation of our products.

MatsDirect UK LTD
 ...the choice matters