


Tested & Stamped to European IEC 61111 Class 0 specification

The NEW product to replace the old BS921 1976 specification a high specification quality natural Rubber compound safety matting product able to withstand the following:

Dielectric test	7,500v
Surface proof test	5,000v
Working voltage	1,000v

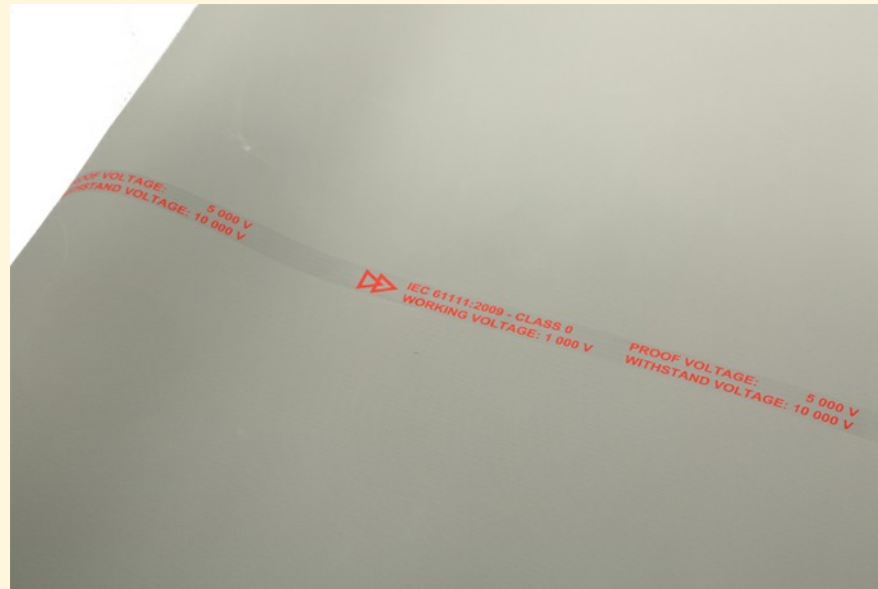

Colour:	Grey & Black	Thickness:mm	3
Hardness:	65 shore A	Weight/M2 (Kg- Approx):	3.7
Tensile:	6.0 Mp	Roll size (10m x 1.0m):	Ex Stock
Temperature Range:	-20/+70DegC	Roll size (10m x 1.2m):	Ex Stock

MD570 Electrosafe Floor Matting Performance.

Fully branded on reverse

Extremely safe from electrical shock and hard wearing Positive safe grip from the flutes

Cleaning and Maintenance:

Matting may be washed with soap or a mild non-bleaching detergent. After washing, the matting should be rinsed thoroughly with water. Matting should be air dried, but not such that the matting temperature exceeds 65°C.