


General-purpose SBR synthetic/natural Rubber matting.

Cobbled pattern design surface offers anti-slip characteristics from any direction of approach.

Cobble Rubber matting is specifically manufactured for horse, cattle and animal transporters but also suitable for various industrial and commercial applications.

Available in extra wide widths reducing area piece fittings and with fluted reverse for drainage.

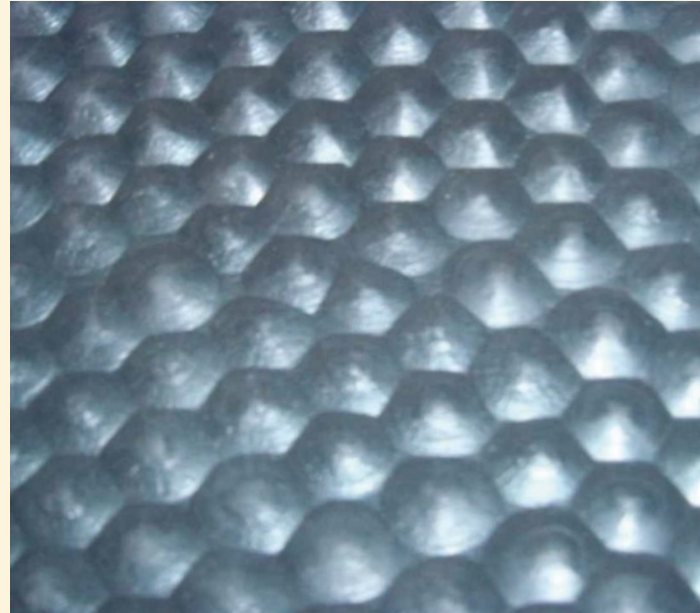

Colours: Black
Hardness: 70Shore A
Tensile: 3.5 Mpa
Elongation: 300%
Temperature Range: -20/+70DegC
Abrasion Resistance:200 mm³

Thickness:mm 10, 12, 15
Weight/M2 (Kg- Approx):14 @ 10mm
Roll size (10m x 1.2m): EX STOCK
Roll size (10m x 1.8m): EX STOCK
Roll size (11m x 2m): EX STOCK
Roll size (10m x 1.8m X 12mm):
EX STOCK
Roll size (11m x 2m X 15mm):
EX STOCK
Custom Cut Mat Service Available

MD665 Suretred Cobble Matting Performance.

Superb impact resistance.

Positive high grip from multi-directional surface.

Unique cobble pattern.

Hard wearing and durable.

Colour Fastness

To sunlight, general cleaning and remedial treatment.

Cleaning and Maintenance:

Vacuum clean. Warm water mop using a neutral detergent.

MatsDirect UK Ltd

Unit 2 Bolholt Industrial Park
Walshaw Road
Bury, Lancashire
BL8 1PL UK

For all enquiries:

Tel: 0044 (0)161-797-6785

Fax: 0044 (0)161-797-6349

E-mail: sales@matsdirect.co.uk